

Estimate eQTL networks using `qpgraph`

Inma Tur^{1,3}, Alberto Roverato² and Robert Castelo¹

January 19, 2023

1. Universitat Pompeu Fabra, Barcelona, Spain.
2. Università di Bologna, Bologna, Italy.
3. Now at Kernel Analytics, Barcelona, Spain.

1 Introduction

In this vignette we introduce the functionality of the `qpgraph` package to estimate eQTL networks from genetical genomics data. To meet the space and time constraints in building this vignette within the `qpgraph` package, we are going to simulate genetical genomics data instead of using a real data set. For this purpose, we will use the functionality described in another vignette from this package, entitled “Simulating molecular regulatory networks using `qpgraph`”. If you use the approach and functions described in this vignette in your own research, please cite the following article:

Tur, I., Roverato, A. and Castelo, R. Mapping eQTL networks with mixed graphical Markov models. *Genetics*, 198(4):1377-1393, 2014.

2 Simulating an eQTL network and data from it

We are going to simulate an eQTL network in the following steps:

1. Load the necessary packages.

```
> library(GenomeInfoDb)
> library(qtl)
> library(qpgraph)
```

2. Simulate a genetic map using the R/CRAN package `qtl`, consisting of nine chromosomes, being 100 cM long with 10 markers equally spaced along each of them, no telomeric markers and no X sexual chromosome.

```
> map <- sim.map(len=rep(100, times=9),
+                  n.mar=rep(10, times=9),
+                  anchor.tel=FALSE,
+                  eq.spacing=TRUE,
+                  include.x=FALSE)
```

3. Create a first empty eQTL network as an empty `eQLcross` object using the previously simulated genetic map.
4. Simulate an eQTL network consisting of 50 genes, where half of them have one *cis*-acting (local) eQTL, there are 5 eQTL *trans*-acting (distant) on 5 genes each and each gene is connected to 2 other genes (default). Each eQTL has an additive effect of

Estimate eQTL networks using *qgraph*

$a = 2$ and each gene-gene association has a marginal correlation $\rho = 0.5$. We seed the random number generator to enable reproducing the same eQTL network employed in this vignette. A dot plot of the simulated eQTL associations is displayed in Figure 1.

```
> set.seed(12345)
> sim.eqtl <- reQLcross(eQLcrossParam(map=map, genes=50, cis=0.5, trans=rep(5, 5)),
+                           a=2, rho=0.5)

> plot(sim.eqtl, main="Simulated eQTL network")
```

5. Simulate genotyping and expression data for 100 individuals from this eQTL network. We seed again the random number generator to enable random sampling the same data.

```
> set.seed(12345)
> cross <- sim.cross(map, sim.eqtl, n.ind=100)
> cross

This is an object of class "cross".
It is too complex to print, so we provide just this summary.

Backcross

No. individuals:    100

No. phenotypes:     50
Percent phenotyped: 100

No. chromosomes:    9
Autosomes:          1 2 3 4 5 6 7 8 9

Total markers:       90
No. markers:         10 10 10 10 10 10 10 10 10
Percent genotyped:  100
Genotypes (%):      AA:50.7 AB:49.3
```

Estimate eQTL networks using *qgraph*

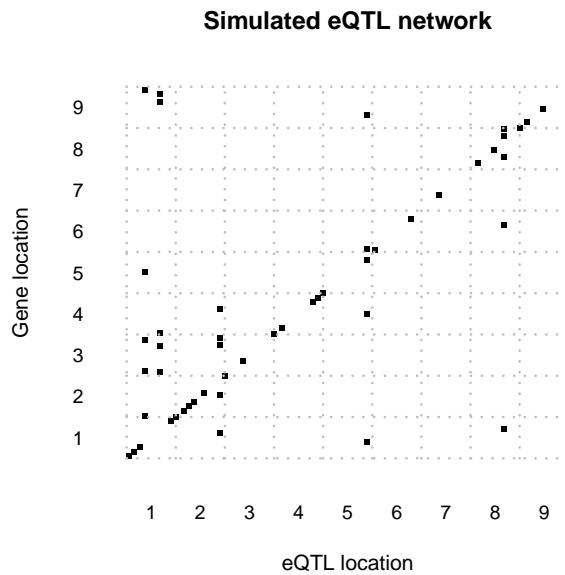


Figure 1: Dot plot of eQTL associations in a simulated eQTL network

3 Estimating an eQTL network from genetical genomics data

Here we briefly illustrate how to estimate an eQTL network from genetical genomics data stored as a R/CRAN *qtl* cross object. This object is the one we have simulated before.

To use this functionality we need to provide an annotation for the genes we have in our data. This is retrieved from the simulated eQTL network object.

```
> annot <- data.frame(chr=as.character(sim.eqtl$genes[, "chr"]),
+                         start=sim.eqtl$genes[, "location"],
+                         end=sim.eqtl$genes[, "location"],
+                         strand=rep("+", nrow(sim.eqtl$genes)),
+                         row.names=rownames(sim.eqtl$genes),
+                         stringsAsFactors=FALSE)
```

For later visualization purposes, we also need a physical map, which we calculate assuming a constant Kb/cM rate of 5. We scale the gene annotations and chromosome lengths also using this Kb/cM rate. We create a *Seqinfo* object storing the chromosome lengths of this simulated genome.

```
> pMap <- lapply(map, function(x) x * 5)
> class(pMap) <- "map"
> annot$start <- floor(annot$start * 5)
> annot$end <- floor(annot$end * 5)
> genome <- Seqinfo(seqnames=names(map), seqlengths=rep(100 * 5, nchr(pMap)),
+                      NA, "simulatedGenome")
```

Estimate eQTL networks using *qgraph*

The entire estimation procedure can be performed in the following steps.

1. Create a parameter object of class *eQTLnetworkEstimationParam*.

```
> param <- eQTLnetworkEstimationParam(cross, physicalMap=pMap,
+                                         geneAnnotation=annot, genome=genome)
```

2. Calculate all marginal associations between markers and genes.

```
> eqtnet.q0 <- eQTLnetworkEstimate(param, ~ marker + gene, verbose=FALSE)
> eqtnet.q0

eQTLnetwork object:
Genome: simulatedGenome
Input size: 90 markers 50 genes
Model formula: ~marker + gene
```

3. Obtain a first estimate of the eQTL network by selecting associations at FDR < 0.05.

```
> eqtnet.q0.fdr <- eQTLnetworkEstimate(param, estimate=eqtnet.q0,
+                                         p.value=0.05, method="fdr")
> eqtnet.q0.fdr

eQTLnetwork object:
Genome: simulatedGenome
Input size: 90 markers 50 genes
Model formula: ~marker + gene (q = 0,)
G^(0,): 140 vertices and 1710 edges corresponding to
822 eQTL and 888 gene-gene associations meeting
a fdr-adjusted p-value < 0.05
and involving 50 genes and 81 eQTLs
```

Display a comparison of the dot plot of the simulated eQTL associations with the ones estimated by marginal associations at FDR < 0.05. The result is shown in Figure 2.

```
> par(mfrow=c(1, 2))
> plot(sim.eqtl, main="Simulated eQTL network")
> plot(eqtnet.q0.fdr, main="Estimated eQTL network")
```

4. Calculate non-rejection rate values with $q = 3$ between markers and genes.

```
> eqtnet.q0.fdr.nrr <- eQTLnetworkEstimate(param, ~ marker + gene | gene(q=3),
+                                         estimate=eqtnet.q0.fdr, verbose=FALSE)
> eqtnet.q0.fdr.nrr

eQTLnetwork object:
Genome: simulatedGenome
Input size: 90 markers 50 genes
Model formula: ~marker + gene | gene (q = 0,3)
G^(0,3): 140 vertices and 1710 edges corresponding to
822 eQTL and 888 gene-gene associations meeting
a fdr-adjusted p-value < 0.05
and involving 50 genes and 81 eQTLs
```

Estimate eQTL networks using *qgraph*

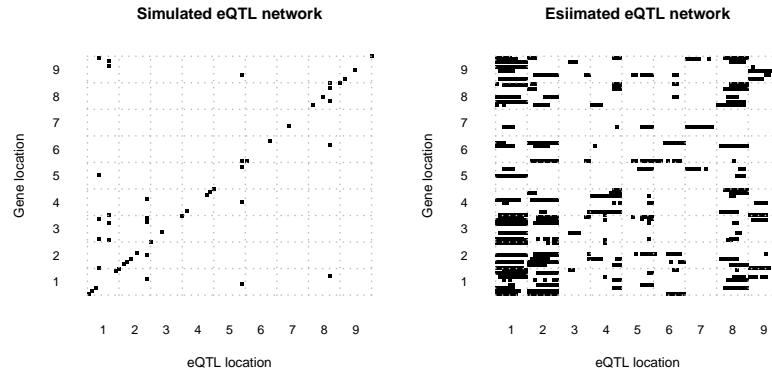


Figure 2: Dot plots of eQTL associations in a simulated eQTL network (left) and in an estimated eQTL network (right) selecting marginal associations at FDR < 5%

5. Obtain a second estimate of the eQTL network by selecting associations at FDR < 0.05 and with non-rejection rate value $\epsilon < 0.1$.

```
> eqtlnet.q0.fdr.nrr <- eQTLnetworkEstimate(param, estimate=eqtlnet.q0.fdr.nrr,
+                                               epsilon=0.1)
> eqtlnet.q0.fdr.nrr

eQTLnetwork object:
Genome: simulatedGenome
Input size: 90 markers 50 genes
Model formula: ~marker + gene | gene (q = 0,3)
G^(0,3): 140 vertices and 355 edges corresponding to
          225 eQTL and 130 gene-gene associations meeting
          a fdr-adjusted p-value < 0.05,
          a non-rejection rate epsilon < 0.10
          and involving 50 genes and 76 eQTLs
```

Display a comparison of the dot plot of the simulated eQTL associations with the ones estimated by marginal associations at FDR < 0.05 and non-rejection rates meeting a cutoff $\epsilon < 0.1$. The result is shown in Figure 3.

```
> par(mfrow=c(1, 2))
> plot(sim.eqtl, main="Simulated eQTL network")
> plot(eqtlnet.q0.fdr.nrr, main="Estimated eQTL network")
```

Examine the median number of eQTLs per gene.

```
> eqtls <- alleQTL(eqtlnet.q0.fdr.nrr)
> median(sapply(split(eqtls$QTL, eqtls$gene), length))
[1] 5
```

6. Note that while we have simulated at most one eQTL per gene, we have currently estimated a median of 6 eQTLs per gene. This leads to the horizontal patterns in the dot plot where multiple markers in the same chromosome target the same gene and are

Estimate eQTL networks using *qgraph*

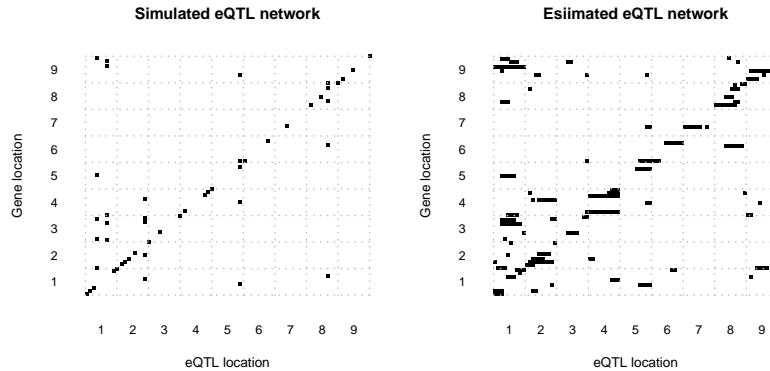


Figure 3: Dot plots of eQTL associations in a simulated eQTL network (left) and in an estimated eQTL network (right) selecting marginal associations at $FDR < 5\%$ and non-rejection rate meeting a cutoff $\epsilon < 0.1$

the result of independently mapping eQTLs that are tagging the same causal one. To remove these redundant eQTL associations we perform a forward selection procedure at a nominal significance level $\alpha < 0.05$, as follows:

```
> eqtlnet.q0.fdr.nrr.sel <- eQTLnetworkEstimate(param, estimate=eqtlnet.q0.fdr.nrr,
+                                                 alpha=0.05)
> eqtlnet.q0.fdr.nrr.sel

eQTLnetwork object:
Genome: simulatedGenome
Input size: 90 markers 50 genes
Model formula: ~marker + gene | gene (q = 0,3)
G^(0,3,*): 140 vertices and 214 edges corresponding to
            84 eQTL and 130 gene-gene associations meeting
            a fdr-adjusted p-value < 0.05,
            a non-rejection rate epsilon < 0.10,
            a forward eQTL selection significance level alpha < 0.05
            and involving 50 genes and 49 eQTLs
```

In Figure 4 we can see a comparison between the dot plots of the simulated eQTL network and the final estimate obtained by first selecting marginal associations at $FDR < 0.05$, discarding those that did not meet a NRR cutoff $\epsilon < 0.1$ and further performing a forward selection procedure at a significance level $\alpha < 0.05$ among eQTLs within the same chromosomes targeting a common gene. Observe that in this final eQTL network estimate many of the redundant eQTL associations have been effectively discarded.

```
> par(mfrow=c(1, 2))
> plot(sim.eqtl, main="Simulated eQTL network")
> plot(eqtlnet.q0.fdr.nrr.sel, main="Estimated eQTL network")
```

Finally, the *qgraph* package provides functionality to ease the visualization of the eQTL network, going beyond the dot plot to display not only eQTL associations, but also the gene-gene associations where one of the two genes has at least one eQTL. This functionality is based on the concept of hive plot (Krzewinski et al., 2012) and has been adapted from the code provided by the *HiveR* package (Hanson, 2014) to display eQTL networks. It uses the

Estimate eQTL networks using *qgraph*

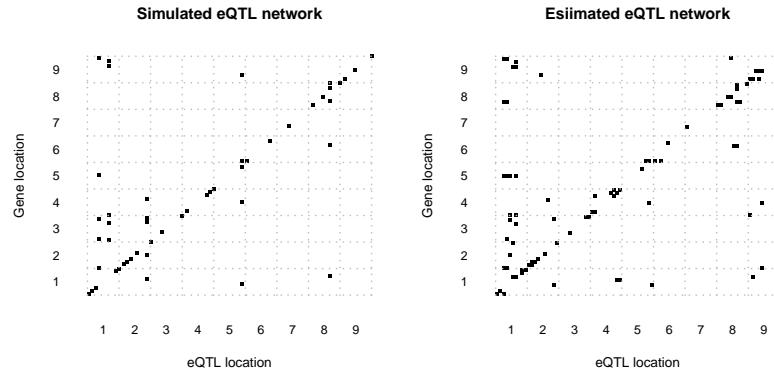


Figure 4: Dot plots of eQTL associations in a simulated eQTL network (left) and in an estimated eQTL network (right) selecting marginal associations at FDR < 5% and non-rejection rate with $\epsilon < 0.1$

grid package for plotting purposes and the code below illustrates how to produce the hive plots in Figure 5, which shows a hive plot per chromosome of the final estimated eQTL network. The fact that in hive plots vertex (node) positions are fixed eases the task of comparing them. In our context, this facilitates the comparison of the genetic control of gene expression across chromosomes.

```
> library(grid)
> library(graph)
> grid.newpage()
> pushViewport(viewport(layout=grid.layout(3, 3)))
> for (i in 1:3) {
+   for (j in 1:3) {
+     chr <- (i-1) * 3 + j
+     pushViewport(viewport(layout.pos.col=j, layout.pos.row=i))
+     plot(eqtnet.q0.fdr.nrr.sel, type="hive", chr=chr)
+     grid.text(paste0("chr", as.roman(chr)), x=unit(0.05, "npc"),
+               y=unit(0.9, "npc"), just="left")
+     grid.text("genes", x=unit(0.08, "npc"), y=unit(0.1, "npc"), just="left",
+               gp=gpar(cex=0.9))
+     grid.text("all chr", x=unit(0.92, "npc"), y=unit(0.2, "npc"), just="right",
+               gp=gpar(cex=0.9))
+     grid.text("genes", x=unit(0.92, "npc"), y=unit(0.1, "npc"), just="right",
+               gp=gpar(cex=0.9))
+     grid.text("markers", x=unit(0.5, "npc"), y=unit(0.95, "npc"), just="centre",
+               gp=gpar(cex=0.9))
+     popViewport(2)
+   }
+ }
```

Estimate eQTL networks using *qgraph*

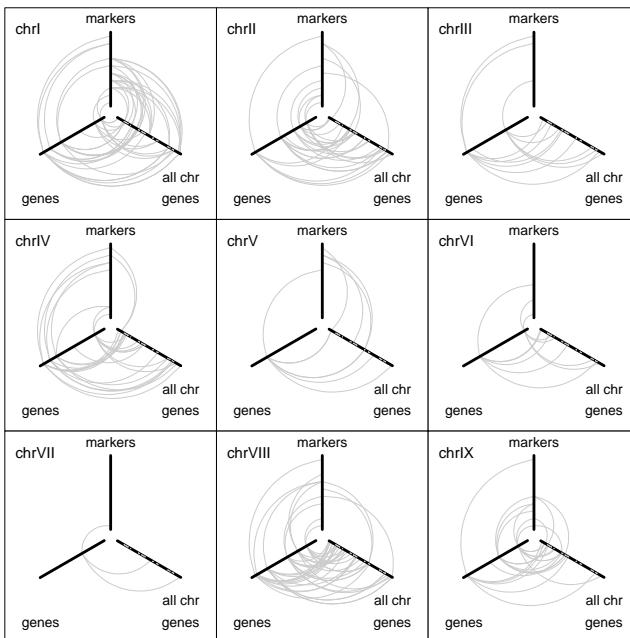


Figure 5: Hive plots of an eQTL network estimated from simulated data, involving only connected components with at least one eQTL association

For each chromosome, the hive plot shows three axes, where markers and genes are ordered from the center according to their genomic location. Vertical and left axes represent the chromosome in the corresponding plot, while the right axis represents the entire genome alternating black and gray along consecutive chromosomes. Edges between genes axes correspond to gene-gene associations.

4 Session information

```
> toLatex(sessionInfo())
■ R version 4.2.2 (2022-10-31), x86_64-pc-linux-gnu
■ Locale: LC_CTYPE=en_US.UTF-8, LC_NUMERIC=C, LC_TIME=en_GB, LC_COLLATE=C,
LC_MONETARY=en_US.UTF-8, LC_MESSAGES=en_US.UTF-8, LC_PAPER=en_US.UTF-8,
LC_NAME=C, LC_ADDRESS=C, LC_TELEPHONE=C, LC_MEASUREMENT=en_US.UTF-8,
LC_IDENTIFICATION=C
■ Running under: Ubuntu 20.04.5 LTS
■ Matrix products: default
■ BLAS: /home/biocbuild/bbs-3.16-bioc/R/lib/libRblas.so
■ LAPACK: /home/biocbuild/bbs-3.16-bioc/R/lib/libRlapack.so
■ Base packages: base, datasets, grDevices, graphics, grid, methods, stats, stats4, utils
■ Other packages: BiocGenerics 0.44.0, GenomeInfoDb 1.34.7, IRanges 2.32.0,
S4Vectors 0.36.1, graph 1.76.0, qgraph 2.32.2, qtl 1.58
■ Loaded via a namespace (and not attached): AnnotationDbi 1.60.0, Biobase 2.58.0,
BiocFileCache 2.6.0, BiocIO 1.8.0, BiocManager 1.30.19, BiocParallel 1.32.5,
BiocStyle 2.26.0, Biostrings 2.66.0, DBI 1.1.3, DelayedArray 0.24.0,
```

Estimate eQTL networks using *qgraph*

```
GenomeInfoDbData 1.2.9, GenomicAlignments 1.34.0, GenomicFeatures 1.50.3,  
GenomicRanges 1.50.2, KEGGREST 1.38.0, Matrix 1.5-3, MatrixGenerics 1.10.0,  
R6 2.5.1, RCurl 1.98-1.9, RSQLite 2.2.20, Rcpp 1.0.9, Rgraphviz 2.42.0,  
Rsamtools 2.14.0, SummarizedExperiment 1.28.0, XML 3.99-0.13, XVector 0.38.0,  
annotate 1.76.0, assertthat 0.2.1, biomaRt 2.54.0, bit 4.0.5, bit64 4.0.5,  
bitops 1.0-7, blob 1.2.3, cachem 1.0.6, cli 3.6.0, codetools 0.2-18, compiler 4.2.2,  
crayon 1.5.2, curl 5.0.0, dbplyr 2.3.0, digest 0.6.31, dplyr 1.0.10, ellipsis 0.3.2,  
evaluate 0.20, fansi 1.0.3, fastmap 1.1.0, filelock 1.0.2, generics 0.1.3, glue 1.6.2,  
hms 1.1.2, htmltools 0.5.4, httr 1.4.4, knitr 1.41, lattice 0.20-45, lifecycle 1.0.3,  
magrittr 2.0.3, matrixStats 0.63.0, memoise 2.0.1, mvtnorm 1.1-3, parallel 4.2.2,  
pillar 1.8.1, pkgconfig 2.0.3, png 0.1-8, prettyunits 1.1.1, progress 1.2.2,  
rappdirs 0.3.3, restfulr 0.0.15, rjson 0.2.21, rlang 1.0.6, rmarkdown 2.19,  
rtracklayer 1.58.0, stringi 1.7.12, stringr 1.5.0, tibble 3.1.8, tidyselect 1.2.0,  
tools 4.2.2, utf8 1.2.2, vctrs 0.5.1, xfun 0.36, xml2 1.3.3, xtable 1.8-4, yaml 2.3.6,  
zlibbioc 1.44.0
```

References

- Hanson, B. A. (2014). *HiveR: 2D and 3D Hive plots for R*. R/CRAN pkg. ver. 0.2-27.
- Krzywinski, M., Birol, I., Jones, S. J., and Marra, M. A. (2012). Hive plots—rational approach to visualizing networks. *Brief Bioinform*, 13(5):627–644.