

# Supplementary Methods - Automatic generation of paper figures

***Joseph D. Barry, Erika Donà, Darren Gilmour, Wolfgang Huber***

## Contents

|     |   |    |
|-----|---|----|
| 1   | Introduction . . . . .                              | 2  |
| 2   | Figure 1 and related supplemental figures . . . . . | 2  |
| 2.1 | Figure 1B . . . . .                                 | 2  |
| 2.2 | Figure 1C . . . . .                                 | 3  |
| 2.3 | Figure 1D . . . . .                                 | 3  |
| 2.4 | Figure 1E . . . . .                                 | 4  |
| 2.5 | Figure S2A . . . . .                                | 5  |
| 2.6 | Figure 1F . . . . .                                 | 6  |
| 2.7 | Figure S2B . . . . .                                | 7  |
| 3   | Figure 2 and related supplemental figures . . . . . | 8  |
| 3.1 | Figure 2B . . . . .                                 | 8  |
| 3.2 | Figure S1 . . . . .                                 | 8  |
| 3.3 | Figure 2C . . . . .                                 | 10 |
| 3.4 | Figure 2D . . . . .                                 | 11 |
| 3.5 | Figure S3A . . . . .                                | 12 |
| 3.6 | Figure S3B . . . . .                                | 12 |
| 4   | Figure 3 and related supplemental figures . . . . . | 13 |
| 4.1 | Figure 3A . . . . .                                 | 13 |
| 4.2 | Figure 3B . . . . .                                 | 14 |
| 4.3 | Figure 3C . . . . .                                 | 15 |
| 4.4 | Figure S4A . . . . .                                | 16 |
| 4.5 | Figure S4B . . . . .                                | 17 |
| 4.6 | Figure S4C . . . . .                                | 18 |

# 1 Introduction

In this vignette we automatically generate figure panels produced for the paper by Barry *et al.*


```
library(TimerQuant)
library(ggplot2)
library(grid)
library(deSolve)
library(reshape2)
library(dplyr)
data("profileGradients")
data("maturationData")
data("FRETdata")
myTheme <- theme_bw() + theme(title=element_text(size=32),
  text=element_text(size=24), axis.title.y=element_text(vjust=1.5),
  panel.grid=element_blank())
```

# 2 Figure 1 and related supplemental figures

## 2.1 Figure 1B

```
t <- seq(0.001, 1200, by=0.1)
p0 <- 10
TA <- 30
TB <- 180
kA <- log(2)/TA
kB <- log(2)/TB
T1 <- 5
T2 <- 100
m1 <- log(2)/T1
m2 <- log(2)/T2
df <- data.frame(t=t, x1B=x1(p0, m1, kB, t), x2B=x1(p0, m2, kB, t),
  x1A=x1(p0, m1, kA, t), x2A=x1(p0, m2, kA, t))
df <- melt(df, id="t")
df$FP <- df[, "halflife"] <- NA
df[df$variable %in% c("x1B", "x1A"), "FP"] <- "FP1"
df[df$variable %in% c("x2B", "x2A"), "FP"] <- "FP2"
df[df$variable %in% c("x1A", "x2A"), "halflife"] <- paste(TA, "minutes")
df[df$variable %in% c("x1B", "x2B"), "halflife"] <- paste(TB, "minutes")
ggplot(df, aes(x=t, y=value, color=FP, linetype=halflife)) + geom_line(size=1) +
  scale_color_manual(values=c("darkgreen", "red")) +
  scale_linetype_manual(values=c("solid", "dashed")) + myTheme +
  scale_x_continuous(breaks=seq(0, 1200, by=200)) +
  theme(legend.position="none") +
  labs(list(linetype="half-life", color="fluorophore")) +
  xlab("time (minutes)") +
  ylab("fluorescence intensity (a.u.)")
```


## Supplementary Methods - Automatic generation of paper figures

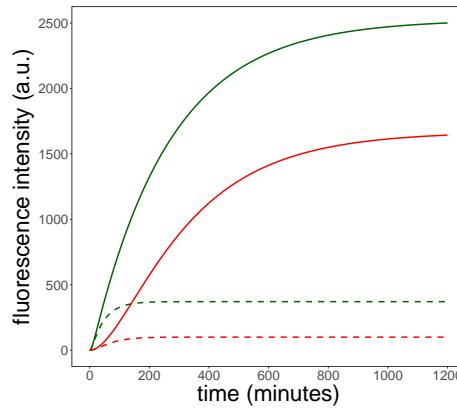

**Figure 1:** Figure 1B: Time-dependent model solutions for FP1 and FP2 fluorescence intensities.

## 2.2 Figure 1C

```
df <- data.frame(t=t[-1], RatioB=x1(p0, m2, kB, t[-1])/x1(p0, m1, kB, t[-1]),
                  RatioA=x1(p0, m2, kA, t[-1])/x1(p0, m1, kA, t[-1]))
df <- melt(df, id="t")
ggplot(df, aes(x=t, y=value, color=variable, linetype=variable))+
  geom_line(size=1)+scale_color_manual(values=c("blue", "blue"))+
  scale_linetype_manual(values=c("solid", "dashed"))+myTheme+
  scale_x_continuous(breaks=seq(0, 1200, by=200))+
  theme(legend.position="none")+xlab("time (minutes)")+
  ylab("FP2/FP1 intensity ratio")
```

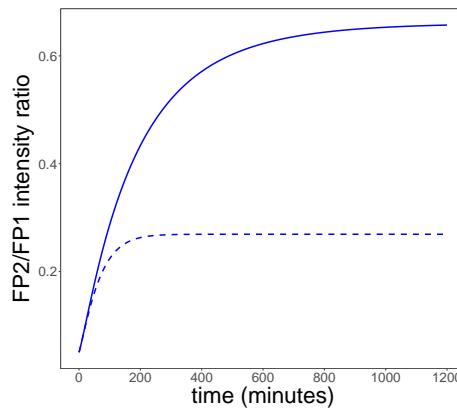

**Figure 2:** Figure 1C: Time-dependent model solution for the FP2/FP1 fluorescence intensity ratio.

## 2.3 Figure 1D


```
halfLifeSeq <- seq(1, 1000, by=0.1)
tRangeFP1 <- c(1, 50)
tRangeFP2 <- c(10, 500)
colRamp <-
  colorRampPalette(colors=c('darkgreen','yellow', 'orange', 'red'))(100)
```

## Supplementary Methods - Automatic generation of paper figures

```

h <- genRatioHeatmap(tRangeFP=tRangeFP2, Tfixed=T1, TA=min(halfLifeSeq),
                      TB=max(halfLifeSeq), channel=2, n=150, ramp=colRamp)
h <- h+geom_hline(yintercept=TA, linetype="dashed", size=1)+geom_hline(yintercept=TB, linetype="dashed", size=1)+myTheme+
  annotation_logticks()+
  theme(legend.position="top", legend.key.width=unit(2.5, "cm"))
print(h)

```

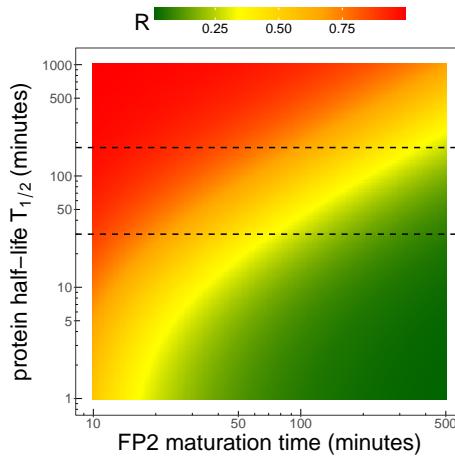

**Figure 3:** Figure 1D: Steady-state ratios as a function of FP2 maturation time and protein half-life.

## 2.4 Figure 1E

```

pSeq <- c(0.5, 2, 8)
nRealizations <- 500
sigmaAdd <- 1
T2 <- getSpacedSeq(c(10, 500), n=100)
res <- lapply(pSeq, function(p) lapply(T2, function(Time)
  simulatedSignalN(T1, T2=Time, TA, TB, sigmaAdd, nRealizations, p=p, E=0)))
dfFP2 <- lapply(seq_along(res), function(i) {
  df2 <- lapply(seq_along(res[[i]]), function(j)
    return(data.frame(p=pSeq[i], Time=T2[j], D=res[[i]][[j]])))
  df2 <- do.call("rbind", df2)
  return(df2)
})
dfFP2 <- do.call("rbind", dfFP2)
dfFP2$FP <- "FP2"
dfFP2s <- dfFP2 %>% group_by(p, Time, FP) %>%
  summarise(D.mean=mean(D, na.rm=TRUE), D.sd=sd(D, na.rm=TRUE))
dfFP2s$D0 <- simulatedSignal(T1, dfFP2s$Time, TA, TB, sigmaAdd=0, p=dfFP2s$p)
T1 <- getSpacedSeq(c(1, 30), n=100)
T2 <- 100
res <- lapply(pSeq, function(p) lapply(T1, function(Time)
  simulatedSignalN(T1=Time, T2, TA, TB, sigmaAdd, nRealizations, p=p, E=0)))
dfFP1 <- lapply(seq_along(res), function(i) {
  df2 <- lapply(seq_along(res[[i]]), function(j)


```

## Supplementary Methods - Automatic generation of paper figures

```

        return(data.frame(p=pSeq[i], Time=T1[j], D=res[[i]][[j]])))
df2 <- do.call("rbind", df2)
return(df2)
})
dfFP1 <- do.call("rbind", dfFP1)
dfFP1$FP <- "FP1"
dfFP1s <- dfFP1 %>% group_by(p, Time, FP) %>%
  summarise(D.mean=mean(D, na.rm=TRUE), D.sd=sd(D, na.rm=TRUE))
dfFP1s$D0 <- simulatedSignal(T1=dfFP1s$Time, T2, TA, TB, sigmaAdd=0, p=dfFP1s$p)
df <- bind_rows(dfFP1s, dfFP2s)
df$p <- paste("\np =", df$p, "molecules/minute\n")
df$Fpline <- df$FP
df$Fpline <- paste0(df$FP, "line")
ggplot(df, aes(Time, D.mean, colour=FP)) + geom_point() + myTheme +
  xlab("FP maturation time (minutes)") + ylab(expression("timer signal"~S)) +
  scale_color_manual(values=c("FP1"="darkgreen", "FP2"="red",
    "FP1line"="black", "FP2line"="black")) +
  scale_x_log10(breaks=getBreaks10(range(df$Time))) +
  geom_errorbar(aes(ymin=D.mean-D.sd, ymax=D.mean+D.sd)) +
  geom_line(aes(Time, D0, colour=Fpline), data=df) +
  facet_wrap(~p) +
  theme(legend.position="none", strip.text=element_text(size=32, lineheight=0.35)) +
  annotation_logticks(sides="b")

```

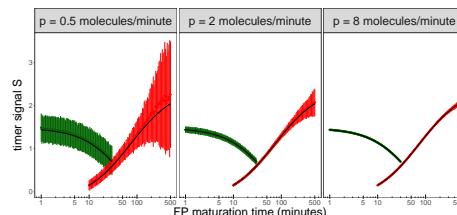

**Figure 4:** Figure 1E: Results of simulations with an additive error model to investigate the effect of noise on timer signal for varying protein production rates.

```
T1 <- 5; T2 <- 100
```

## 2.5 Figure S2A

```

ESeq <- c(0, 0.25, 0.5, 0.75, 1)
p <- 2
nRealizations <- 500
sigmaAdd <- 1
T2 <- getSpacedSeq(c(10, 500), n=100)
res <- lapply(ESeq, function(E) lapply(T2, function(Time)
  simulatedSignalN(T1, T2=Time, TA, TB, sigmaAdd, nRealizations, p=p, E=E)))
dfFP2 <- lapply(seq_along(res), function(i) {
  df2 <- lapply(seq_along(res[[i]]), function(j)
    return(data.frame(E=ESeq[i], Time=T2[j], D=res[[i]][[j]])))
  df2 <- do.call("rbind", df2)
  return(df2)
})

```

## Supplementary Methods - Automatic generation of paper figures

```

    })
dfFP2 <- do.call("rbind", dfFP2)
dfFP2$FP <- "FP2"
dfFP2s <- dfFP2 %>% group_by(E, Time, FP) %>%
  summarise(D.mean=mean(D, na.rm=TRUE), D.sd=sd(D, na.rm=TRUE))
dfFP2s$D0 <- simulatedSignal(T1, dfFP2s$Time, TA, TB, sigmaAdd=0, p=p,
  E=dfFP2s$E)
T1 <- getSpacedSeq(c(1, 30), n=100)
T2 <- 100
res <- lapply(ESeq, function(E) lapply(T1, function(Time)
  simulatedSignalN(T1=Time, T2, TA, TB, sigmaAdd, nRealizations, p=p, E=E)))
dfFP1 <- lapply(seq_along(res), function(i) {
  df2 <- lapply(seq_along(res[[i]]), function(j)
    return(data.frame(E=ESeq[i], Time=T1[j], D=res[[i]][[j]])))
  df2 <- do.call("rbind", df2)
  return(df2)
})
dfFP1 <- do.call("rbind", dfFP1)
dfFP1$FP <- "FP1"
dfFP1s <- dfFP1 %>% group_by(E, Time, FP) %>%
  summarise(D.mean=mean(D, na.rm=TRUE), D.sd=sd(D, na.rm=TRUE))
dfFP1s$D0 <- simulatedSignal(T1=dfFP1s$Time, T2, TA, TB, sigmaAdd=0, E=dfFP1s$E,
  p=p)
dffRET <- bind_rows(dfFP1s, dfFP2s)
dffRET$E <- paste("\nFRET efficiency E =", dffRET$E, "\n")
dffRET$Fpline <- dffRET$FP
dffRET$Fpline <- paste0(dffRET$FP, "line")
ggplot(dffRET, aes(Time, D.mean, colour=FP))+geom_point()+myTheme+
  xlab("FP maturation time (minutes)")+ylab(expression("timer signal"~S))+
  scale_color_manual(values=c("FP1"="darkgreen", "FP2"="red",
    "FP1line"="black", "FP2line"="black"))+
  scale_x_log10(breaks=getBreaks10(range(dffRET$Time)))+
  geom_errorbar(aes(ymin=D.mean-D.sd, ymax=D.mean+D.sd))+
  geom_line(aes(Time, D0, colour=Fpline), data=dffRET)+
  facet_wrap(~E, nrow=2)+
  theme(legend.position="none", strip.text=element_text(size=32,
    lineheight=0.35))+
  annotation_logticks(sides="b")

```

T1 <- 5; T2 <- 100

## 2.6 Figure 1F


```

dfs <- filter(df, FP == "FP2")
dfs$CV <- dfs$D.sd/dfs$D.mean

dfFit <- dfs %>% group_by(p, FP) %>% do(fitCV(.))
ggplot(dfs, aes(Time, D.sd/D.mean, color=p))+geom_point()+myTheme+
  scale_x_log10(breaks=getBreaks10(range(dfs$Time)))+
  scale_y_log10(breaks=getBreaks10(range(dfs$CV)))+


```

## Supplementary Methods - Automatic generation of paper figures

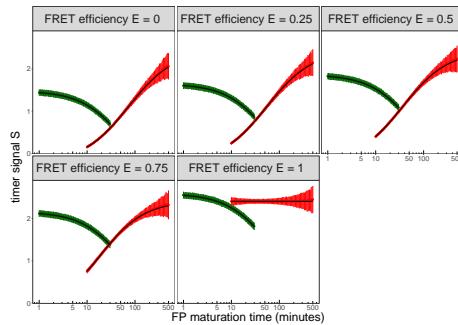

**Figure 5:** Figure S2A: Results of simulations with an additive error model to investigate the effect of noise on timer signal for varying levels of FRET.

```
scale_colour_manual(values=c("#999999", "#009E73", "#CC79A7"))+
  xlab("FP2 maturation time (minutes)")+
  ylab(expression("coefficient of variation"~sigma[S]~/~mu[S]))+
  geom_line(aes(Time, CV), size=1.5, data=dfFit)+
  geom_vline(aes(xintercept=FP2optimumTime, color=p), data=dfFit,
             linetype="dashed")+
  theme(legend.position="none")+
  annotation_logticks()
```

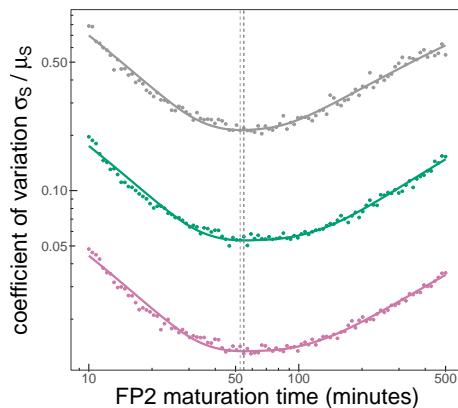

**Figure 6:** Figure 1F: Coefficient of variation as a function of FP2 maturation time for different protein production rates.

## 2.7 Figure S2B

```
dfs <- filter(dffRET, FP == "FP2")
dfs$CV <- dfs$D.sd/dfs$D.mean


myCol <- colorRampPalette(c("#999999", "#009E73", "#CC79A7"))(5)
dfFit <- dfs %>% group_by(E, FP) %>% do(fitCV(.))
ggplot(dfs, aes(Time, D.sd/D.mean, color=E))+geom_point() + myTheme +
  scale_x_log10(breaks=getBreaks10(range(dfs$Time)))+
  scale_y_log10(breaks=getBreaks10(range(dfs$CV)))+
  scale_colour_manual(values=myCol)+
```

## Supplementary Methods - Automatic generation of paper figures

```

xlab("FP2 maturation time (minutes)")+
ylab(expression("coefficient of variation"~sigma[S]~/~mu[S]))+
geom_line(aes(Time, CV), size=1.5, data=dfFit)+
geom_vline(aes(xintercept=FP2optimumTime, color=E), data=dfFit,
linetype="dashed")+
theme(legend.position="none")+
annotation_logticks()

```

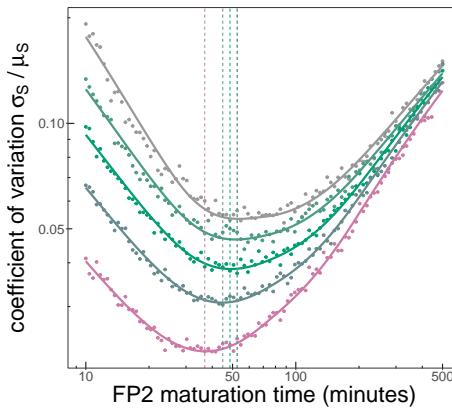

**Figure 7:** Figure S2B: Coefficient of variation as a function of FP2 maturation time for different FRET efficiencies.

## 3 Figure 2 and related supplemental figures

### 3.1 Figure 2B


```

myCol <- c(tdTom="orange", TagRFP="darkred", mKate2="purple")
A <- profileGradients
Ahat <- apply(A, c(1, 2), function(x) x/mean(x[1:6]))
Ahat <- aperm(Ahat, c(2, 3, 1))
Ahat <- log2(Ahat)
plotPrimordiumProfile(Ahat["mKate2", , ], ylim=c(-0.3, 1.3), xlim=c(-200, 0),
                      ylab="timer signal", col=myCol["mKate2"], lwd=3, lty=3,
                      cex.axis=1.5, cex.lab=2.5, alpha=0.1)
plotPrimordiumProfile(Ahat["TagRFP", , ], add=TRUE, lty=2, col=myCol["TagRFP"],
                      lwd=3, alpha=0.1)
plotPrimordiumProfile(Ahat["tdTom", , ], add=TRUE, lty=1, col=myCol["tdTom"],
                      lwd=3, alpha=0.1)
abline(v=0, lty=2)
abline(v=-25, lty=2)
nSamples <- c(tdTom=34, TagRFP=40, mKate2=52)
myLegend <- paste0(names(nSamples), "-sfGFP (n=", nSamples, ")")
legend(x=-100, y=1.2, legend=myLegend, lty=1:3, lwd=3, cex=1.5, col=myCol)

```

### 3.2 Figure S1

## Supplementary Methods - Automatic generation of paper figures

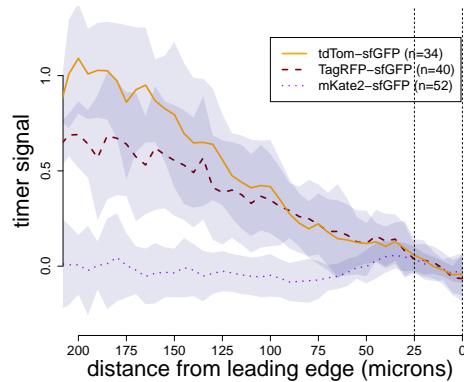

**Figure 8:** Figure 2B: Comparing the timer signal profiles of three different timers in the zebrafish posterior lateral line primordium.

```

A <- maturationData
A[, "meanGFP", 4, 3, "mKate2"] <- NA # jump in signal in gfp
A[, "meanGFP", 2, 2, "TagRFP"] <- NA # jump in signal in gfp
A[, "meanGFP", 1, 4, "tdTom"] <- NA # jump in gfp
A[, "meanRFP", 1:2, 1:4, "TagRFP"] <- NA

A <- A[as.integer(dimnames(A)$t) <= 800, c("meanGFP", "meanRFP"), , , ]
A[as.integer(dimnames(A)$t) > 500, "meanGFP", , , ] <- NA
indT <- which(dimnames(A)$t == "500")

myNorm <- function(x, indT) {
  x <- x-min(x, na.rm=TRUE)
  x[x < 0] <- NA
  x <- x/x[indT]
  return(x)
}


Anorm <- apply(A, c(2, 3, 4, 5), myNorm, indT)
dimnames(Anorm) <- dimnames(A)

AnormSummarizeViews <- apply(Anorm, c(1, 2, 3, 5), mean, na.rm=TRUE)
AnormSummarizeSamples <- apply(AnormSummarizeViews, c(1, 2, 4), mean,
                                na.rm=TRUE)
Amelt <- melt(AnormSummarizeSamples, id="t")
Amelt$tFTs <- as.factor(paste0(Amelt$tFTs, "-sfGFP"))
o <- match(levels(Amelt$tFT), paste0(names(myCol), "-sfGFP"))
Amelt$tFTs <- factor(Amelt$tFTs, levels=levels(Amelt$tFTs)[o])
ggplot(na.omit(Amelt), aes(x=t, y=value, color=tFTs))+geom_line(size=2)+  

  facet_wrap(~data, scales="free_x")+
  scale_color_manual(values=as.vector(myCol))+  

  geom_vline(xintercept=500, linetype="dashed")+
  xlab("time (minutes)")+ylab("normalized fluorescence intensity")+myTheme


```

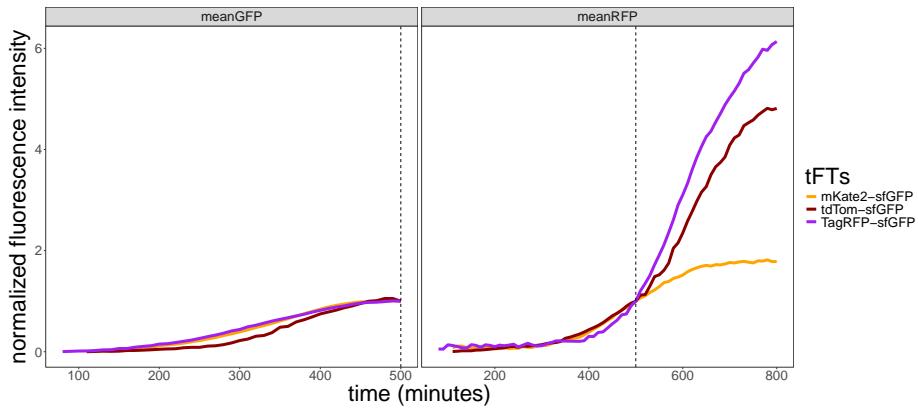

**Figure 9:** Figure S1: Comparing the maturation rates of three different RFPs.

### 3.3 Figure 2C

```
FRET <- FRETdata
myColReduced <- myCol[names(myCol) %in% FRET$tFT]
FRET$tFT <- paste0(FRET$tFT, "-sfGFP")
FRET$tFT <- as.factor(FRET$tFT)
o <- match(levels(FRET$tFT), paste0(names(myCol), "-sfGFP"))
FRET$tFT <- factor(FRET$tFT, levels=levels(FRET$tFT)[o])
ggplot(FRET, aes(tFT, FRET, fill="white"))+
  geom_boxplot(outlier.size=0, fill="white")+
  geom_point(aes(x=tFT, y=FRET, colour=tFT, size=4), position="jitter")+
  scale_color_manual(values=as.vector(myColReduced))+xlab("")+myTheme+
  ylab("FRET efficiency")+theme(legend.position="none")+
  theme(axis.text.x=element_text(size=24))
```

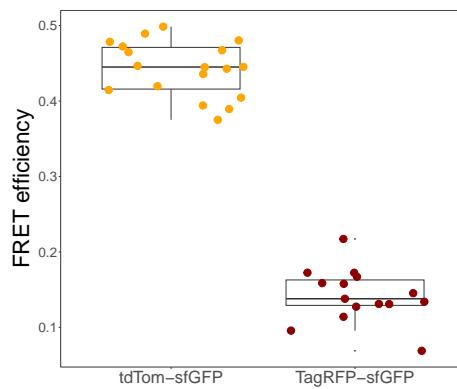

**Figure 10:** Figure 2C: FRET efficiency measurements for tdTom-sfGFP and TagRFP-sfGFP.

```
FRETs <- tapply(FRET$FRET, FRET$tFT, median)
print(FRETs)


##  tdTom-sfGFP  TagRFP-sfGFP
##      0.445049     0.137931
```

### 3.4 Figure 2D

```

FPestimate <- c(mKate2=15, tdTom=80, TagRFP=100)
tFTs <- names(FPestimate)
Rhat <- sapply(tFTs, function(ch) median(Ahat[ch, , "200"], na.rm=TRUE))
Tfront <- 60; Tback <- 5*Tfront
Tseq <- seq(Tfront, Tback, length=100)
T1 <- 6
df <- data.frame(
    halfLife=Tseq,
    tdTomNoFret=signal(T1=T1, T2=FPestimate["tdTom"], TA=Tfront, TB=Tseq, E=0),
    tdTomFret=signal(T1=T1, T2=FPestimate["tdTom"], TA=Tfront, TB=Tseq,
        E=FRETs["tdTom-sfGFP"]),
    TagRFPNoFret=signal(T1=T1, T2=FPestimate["TagRFP"], TA=Tfront, TB=Tseq,
        E=0),
    TagRFPFret=signal(T1=T1, T2=FPestimate["TagRFP"], TA=Tfront, TB=Tseq,
        E=FRETs["TagRFP-sfGFP"]))
df <- melt(df, id="halfLife")
df$FRET <- !grepl(x=as.character(df$variable), pattern="NoFret")
df$FRET <- factor(df$FRET, levels=c("TRUE", "FALSE"))
df$tFT[grepl(x=as.character(df$variable), pattern="mKate2")] <- "mKate2-sfGFP"
df$tFT[grepl(x=as.character(df$variable), pattern="tdTom")] <- "tdTom-sfGFP"
df$tFT[grepl(x=as.character(df$variable), pattern="TagRFP")] <- "TagRFP-sfGFP"
df$tFT <- factor(df$tFT, levels=paste0(names(myCol), "-sfGFP"))
ggplot(df, aes(x=halfLife, y=value, color=tFT, linetype=FRET))+
    geom_line(size=1)+
    scale_color_manual(values=as.vector(myColReduced),
        guide=guide_legend(title="timer"))+
    scale_linetype_manual(values=c("solid", "dashed"))+
    xlab("simulated protein half-life (minutes)")+
    ylab(expression("simulated timer signal"))+
    geom_vline(xintercept=Tfront, linetype="dotted")+
    scale_x_reverse() + myTheme +
    theme(legend.position=c(0.77, 0.85), legend.key.width=unit(2, "cm"),
        legend.box.just="left")

```

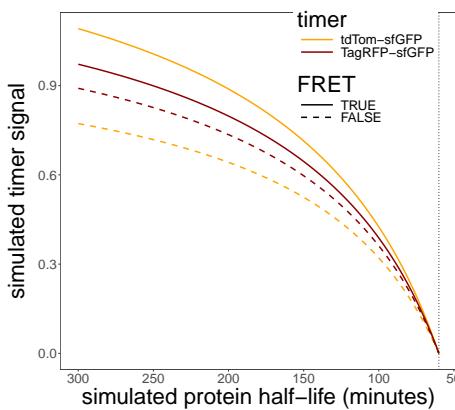


**Figure 11:** Figure 2D: Model shows that the addition of FRET can cause a reordering of profile slopes.

### 3.5 Figure S3A

```
t <- seq(0.001, 1000, by=0.1)
x1ss0 <- x1ss(p0, m2, kB, f=1)
tss0 <- tss(m2, kB)
df <- data.frame(t=t, x1=x1(p0, m2, kB, t))
ggplot(df, aes(t, x1))+geom_line(col="red", size=1)+xlab("time (minutes)")+
  ylab("FP2 fluorescence intensity (a.u.)")+
  geom_hline(yintercept=x1ss0)+
  geom_abline(intercept=TimerQuant:::inflectionOffset(p0, m2, kB, 0),
              slope=TimerQuant:::inflectionSlope(p0, m2, kB, 0))+  

  geom_vline(xintercept=tss0, linetype="dotted", size=2)+  


  geom_point(data=NULL, aes(x=tss0, y=x1ss0), color="blue", size=4)+myTheme
```

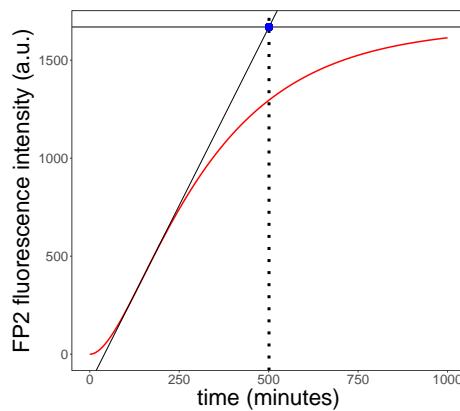

**Figure 12:** Figure S4A: Quantification of the time to reach steady-state.

### 3.6 Figure S3B

```
tRange <- c(10, 100)
colRamp <- rainbow(120)[1:100]
h <- genTimeSteadyStateHeatmap(tRange, tRange, n=150, ramp=colRamp)+myTheme+
  annotation_logticks()
print(h)
```

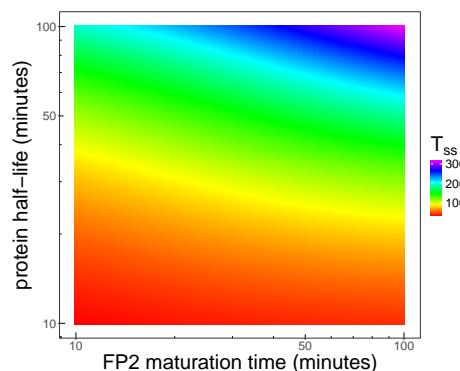

**Figure 13:** Figure S4B: Time to reach steady-state.

## 4 Figure 3 and related supplemental figures

```
t <- seq(0, 600, length=1000)
t0 <- min(t); tf <- max(t)
p0 <- 10; k0 <- log(2)/60
k1 <- log(2)/30
m1 <- log(2)/T1; m2 <- log(2)/T2
x01 <- c(X1=x0ss(p0, m1, k0), X2=x1ss(p0, m1, k0))
x02 <- c(X1=x0ss(p0, m2, k0), X2=x1ss(p0, m2, k0))
```

### 4.1 Figure 3A

```
myBreaks <- seq(0, 600, by=120)
dfp <- data.frame(t=t,
  linearIncrease=rFun("linearIncrease", r0=p0, tf=tf)(t),
  linearDecrease=rFun("linearDecrease", r0=p0, tf=tf)(t))
types <- colnames(dfp)[-1]
dfp <- melt(dfp, id="t")
gp <- ggplot(dfp, aes(t, value))+geom_line(size=1)+  

  facet_wrap(~variable, ncol=1)+  

  xlab("time (minutes)")+ylab("production rate (molecules per minute)")+  

  scale_x_continuous(breaks=myBreaks)+myTheme
dfk <- data.frame(t=t,
  linearIncrease=rFun("linearIncrease", r0=k0, tf=tf)(t),
  linearDecrease=rFun("linearDecrease", r0=k0, tf=tf)(t))
dfk <- melt(dfk, id="t")
gk <- ggplot(dfk, aes(t, value))+geom_line(size=1)+  

  facet_wrap(~variable, ncol=1)+xlab("time (minutes)")+  

  ylab(expression(paste("degradation rate (minutes"^{~-1}, "))))+  

  scale_x_continuous(breaks=myBreaks)+myTheme
df <- lapply(types, function(n) solveModel(x01, x02, t, m1=m1, m2=m2,  

  typeProd=n, typeDeg=n, p0=p0, k0=k0))
for (i in seq_along(df)) df[[i]]$type <- types[i]
df <- do.call("rbind", df)
df <- na.omit(df)

reorderFactors <- function(x, channel="uid", ordering) {
  x[, channel] <- as.factor(x[, channel])
  o <- match(ordering, levels(x[, channel]))
  x[, channel] <- factor(x[, channel], levels(x[, channel])[o])
  return(x)
}

df <- reorderFactors(df, "type", types)
df2 <- melt(df, id=c("time", "typeProd", "typeDeg", "type"))
df2 <- filter(df2, variable %in% c("FP1", "FP2"))
g2 <- ggplot(df2, aes(time, value, color=variable))+geom_line(size=1)+  

  facet_wrap(~type, ncol=1, scales="fixed")+xlab("time (minutes)")+  

  scale_x_continuous(breaks=myBreaks)+  

  scale_color_manual(values=c("darkgreen", "red"))+
```

## Supplementary Methods - Automatic generation of paper figures

```

ylab("FP1, FP2 fluorescence intensity (a.u.)")+myTheme+
theme(legend.position="none")
g3 <- ggplot(df, aes_string("time", "Ratio"))+geom_line(color="blue", size=1)+  


facet_wrap(~type, ncol=1, scales="fixed")+xlab("time (minutes)")+  

ylab("FP2/FP1 intensity ratio")+
scale_x_continuous(breaks=myBreaks)+  

myTheme  

grid.newpage()
pushViewport(viewport(layout=grid.layout(1, 4)))
print(gp, vp=viewport(layout.pos.row=1, layout.pos.col=1))
print(gk, vp=viewport(layout.pos.row=1, layout.pos.col=2))
print(g2, vp=viewport(layout.pos.row=1, layout.pos.col=3))
print(g3, vp=viewport(layout.pos.row=1, layout.pos.col=4))

```

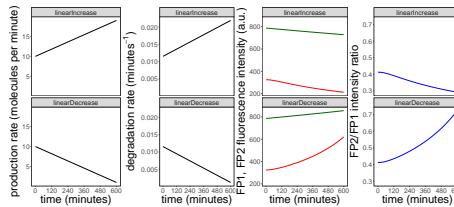

**Figure 14:** Figure 3A: Timer readouts for simulations where production and degradation are changing over time, but adding or removing proteins from the system at comparable rates.

## 4.2 Figure 3B

```

dfp <- data.frame(t=t,
burst=rFun("burst", r0=p0, tf=tf)(t),
stepUp=rFun("stepUp", r0=p0, tf=tf)(t))
types <- colnames(dfp)[-1]
dfp <- melt(dfp, id="t")
gp <- ggplot(dfp, aes(t, value))+geom_line(size=1)+  

facet_wrap(~variable, ncol=1)+xlab("time (minutes)")+  

ylab("production rate (molecules per minute)")+
scale_x_continuous(breaks=myBreaks)+myTheme
df <- lapply(types, function(n) solveModel(x01, x02, t, m1=m1, m2=m2,  

typeProd=n, typeDeg="constant", p0=p0, k0=k0))
for (i in seq_along(df)) df[[i]]$type <- types[i]
df <- do.call("rbind", df)
df <- na.omit(df)
df2 <- melt(df, id=c("time", "typeProd", "typeDeg", "type"))
df2 <- filter(df2, variable %in% c("FP1", "FP2"))
g2 <- ggplot(df2, aes(time, value, color=variable))+geom_line(size=1)+  

facet_wrap(~type, ncol=1, scales="fixed")+xlab("time (minutes)")+  

scale_x_continuous(breaks=myBreaks)+  

scale_color_manual(values=c("darkgreen", "red"))+
ylab("FP1, FP2 fluorescence intensity (a.u.)")+myTheme+
theme(legend.position="none")
g3 <- ggplot(df, aes_string("time", "Ratio"))+geom_line(color="blue", size=1)+  

facet_wrap(~type, ncol=1, scales="fixed")+xlab("time (minutes)")+

```

## Supplementary Methods - Automatic generation of paper figures

```

ylab("FP2/FP1 intensity ratio")+
scale_x_continuous(breaks=myBreaks)+  

myTheme  

grid.newpage()  


pushViewport(viewport(layout=grid.layout(1, 3)))  

print(gp, vp=viewport(layout.pos.row=1, layout.pos.col=1))  

print(g2, vp=viewport(layout.pos.row=1, layout.pos.col=2))  

print(g3, vp=viewport(layout.pos.row=1, layout.pos.col=3))

```

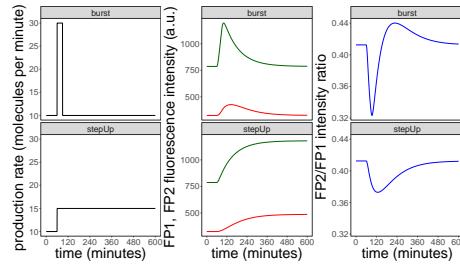

**Figure 15:** Figure 3B: The effect of rapidly changing production dynamics on timer readouts.

## 4.3 Figure 3C

```

dfk <- data.frame(t=t,  

                   stepDown=rFun("stepDown", r0=k0, tf=tf)(t),  

                   stepUp=rFun("stepUp", r0=k0, tf=tf)(t))  

types <- colnames(dfk)[-1]  

dfk <- melt(dfk, id="t")  

gk <- ggplot(dfk, aes(t, value))+geom_line(size=1)+xlab("time (minutes)")+  

      ylab(expression(paste("degradation rate (minutes^{-1}), ")))+  

      facet_wrap(~variable, ncol=1)+scale_x_continuous(breaks=myBreaks)+myTheme  

df <- lapply(types, function(n) solveModel(x01, x02, t, m1=m1, m2=m2,  

                                             typeProd="constant", typeDeg=n, p0=p0, k0=k0))  

for (i in seq_along(df)) df[[i]]$type <- types[i]  

df <- do.call("rbind", df)  

df <- na.omit(df)  

df2 <- melt(df, id=c("time", "typeProd", "typeDeg", "type"))  

df2 <- filter(df2, variable %in% c("FP1", "FP2"))  

g2 <- ggplot(df2, aes(time, value, color=variable))+geom_line(size=1)+  

      xlab("time (minutes)")+  

      facet_wrap(~typeDeg, ncol=1, scales="fixed")+  

      scale_x_continuous(breaks=myBreaks)+  

      scale_color_manual(values=c("darkgreen", "red"))+  

      ylab("FP1, FP2 fluorescence intensity (a.u.)")+myTheme+  

      theme(legend.position="none")  

g3 <- ggplot(df, aes_string("time", "Ratio"))+geom_line(color="blue", size=1)+  

      facet_wrap(~typeDeg, ncol=1, scale="fixed")+xlab("time (minutes)")+  

      ylab("FP2/FP1 intensity ratio")+scale_x_continuous(breaks=myBreaks)+myTheme  

grid.newpage()  


pushViewport(viewport(layout=grid.layout(1, 3)))  

print(gk, vp=viewport(layout.pos.row=1, layout.pos.col=1))

```

## Supplementary Methods - Automatic generation of paper figures

```
print(g2, vp=viewport(layout.pos.row=1, layout.pos.col=2))
print(g3, vp=viewport(layout.pos.row=1, layout.pos.col=3))
```

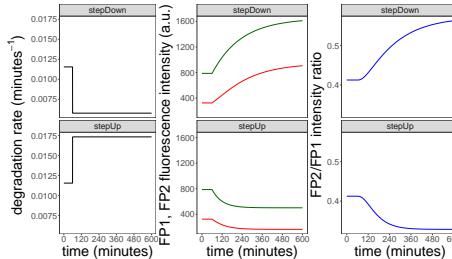

**Figure 16:** Figure 3C: The effect of rapidly changing degradation dynamics on timer readouts.

## 4.4 Figure S4A

```
E <- 0.5
myBreaks <- seq(0, 600, by=120)
dfp <- data.frame(t=t,
  linearIncrease=rFun("linearIncrease", r0=p0, tf=tf)(t),
  linearDecrease=rFun("linearDecrease", r0=p0, tf=tf)(t))
types <- colnames(dfp)[-1]
dfp <- melt(dfp, id="t")
gp <- ggplot(dfp, aes(t, value))+geom_line(size=1)+facet_wrap(~variable, ncol=1)+
  xlab("time (minutes)")+ylab("production rate (molecules per minute)")+
  scale_x_continuous(breaks=myBreaks)+myTheme
dfk <- data.frame(t=t,
  linearIncrease=rFun("linearIncrease", r0=k0, tf=tf)(t),
  linearDecrease=rFun("linearDecrease", r0=k0, tf=tf)(t))
dfk <- melt(dfk, id="t")
gk <- ggplot(dfk, aes(t, value))+geom_line(size=1)+ 
  facet_wrap(~variable, ncol=1)+xlab("time (minutes)")+
  ylab(expression(paste("degradation rate (minutes^{-1}), ")))+
  scale_x_continuous(breaks=myBreaks)+myTheme
df <- lapply(types, function(n) solveModel(x01, x02, t, m1=m1, m2=m2,
  typeProd=n, typeDeg=n, p0=p0, k0=k0, E=E))
for (i in seq_along(df)) df[[i]]$type <- types[i]
df <- do.call("rbind", df)
df <- na.omit(df)

reorderFactors <- function(x, channel="uid", ordering) {
  x[, channel] <- as.factor(x[, channel])
  o <- match(ordering, levels(x[, channel]))
  x[, channel] <- factor(x[, channel], levels(x[, channel])[o])
  return(x)
}

df <- reorderFactors(df, "type", types)
df2 <- melt(df, id=c("time", "typeProd", "typeDeg", "type"))
df2 <- filter(df2, variable %in% c("FP1", "FP2"))
```

## Supplementary Methods - Automatic generation of paper figures

```

g2 <- ggplot(df2, aes(time, value, color=variable))+geom_line(size=1)+  

  facet_wrap(~type, ncol=1, scales="fixed")+xlab("time (minutes)")+  

  scale_x_continuous(breaks=myBreaks)+  

  scale_color_manual(values=c("darkgreen", "red"))+  

  ylab("FP1, FP2 fluorescence intensity (a.u.)")+myTheme+  

  theme(legend.position="none")  

g3 <- ggplot(df, aes_string("time", "Ratio"))+geom_line(color="blue", size=1)+  

  facet_wrap(~type, ncol=1, scales="fixed")+xlab("time (minutes)")+  

  ylab("FP2/FP1 intensity ratio")+  

  scale_x_continuous(breaks=myBreaks)+  

  myTheme  

grid.newpage()  

pushViewport(viewport(layout=grid.layout(1, 4)))  


print(gp, vp=viewport(layout.pos.row=1, layout.pos.col=1))  

print(gk, vp=viewport(layout.pos.row=1, layout.pos.col=2))  

print(g2, vp=viewport(layout.pos.row=1, layout.pos.col=3))  

print(g3, vp=viewport(layout.pos.row=1, layout.pos.col=4))

```

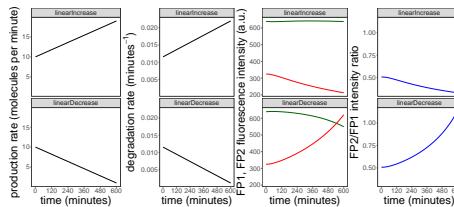

**Figure 17:** Figure S4A: Timer readouts for simulations with FRET where production and degradation are changing over time, but adding or removing proteins from the system at comparable rates.

## 4.5 Figure S4B

```

dfp <- data.frame(t=t,  

  burst=rFun("burst", r0=p0, tf=tf)(t),  

  stepUp=rFun("stepUp", r0=p0, tf=tf)(t))  

types <- colnames(dfp)[-1]  

dfp <- melt(dfp, id="t")  

gp <- ggplot(dfp, aes(t, value))+geom_line(size=1)+  

  facet_wrap(~variable, ncol=1)+  

  xlab("time (minutes)")+ylab("production rate (molecules per minute)")+  

  scale_x_continuous(breaks=myBreaks)+myTheme  

df <- lapply(types, function(n) solveModel(x01, x02, t, m1=m1, m2=m2,  

  typeProd=n, typeDeg="constant", p0=p0, k0=k0, E=E))  

for (i in seq_along(df)) df[[i]]$type <- types[i]  

df <- do.call("rbind", df)  

df <- na.omit(df)  

df2 <- melt(df, id=c("time", "typeProd", "typeDeg", "type"))  

df2 <- filter(df2, variable %in% c("FP1", "FP2"))  

g2 <- ggplot(df2, aes(time, value, color=variable))+geom_line(size=1)+  

  facet_wrap(~type, ncol=1, scales="fixed")+xlab("time (minutes)")+  

  scale_x_continuous(breaks=myBreaks)+  

  scale_color_manual(values=c("darkgreen", "red"))+

```

## Supplementary Methods - Automatic generation of paper figures

```


ylab("FP1, FP2 fluorescence intensity (a.u.)")+myTheme+
theme(legend.position="none")
g3 <- ggplot(df, aes_string("time", "Ratio"))+geom_line(color="blue", size=1)+  

facet_wrap(~type, ncol=1, scales="fixed")+xlab("time (minutes)")+  

ylab("FP2/FP1 intensity ratio")+
scale_x_continuous(breaks=myBreaks)+  

myTheme
grid.newpage()
pushViewport(viewport(layout=grid.layout(1, 3)))
print(gp, vp=viewport(layout.pos.row=1, layout.pos.col=1))
print(g2, vp=viewport(layout.pos.row=1, layout.pos.col=2))
print(g3, vp=viewport(layout.pos.row=1, layout.pos.col=3))

```

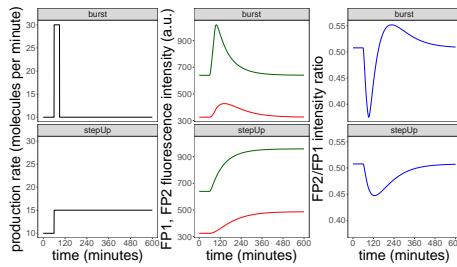

**Figure 18:** Figure S4B: The effect of rapidly changing production dynamics on timer readouts when FRET is present.

## 4.6 Figure S4C

```

dfk <- data.frame(t=t,
  stepDown=rFun("stepDown", r0=k0, tf=tf)(t),
  stepUp=rFun("stepUp", r0=k0, tf=tf)(t))
types <- colnames(dfk)[-1]
dfk <- melt(dfk, id="t")
gk <- ggplot(dfk, aes(t, value))+geom_line(size=1)+xlab("time (minutes)")+
  ylab(expression(paste("degradation rate (minutes")^{-1}, ")))+
  facet_wrap(~variable, ncol=1)+scale_x_continuous(breaks=myBreaks)+myTheme
df <- lapply(types, function(n) solveModel(x01, x02, t, m1=m1, m2=m2,
  typeProd="constant", typeDeg=n, p0=p0, k0=k0, E=E))
for (i in seq_along(df)) df[[i]]$type <- types[i]
df <- do.call("rbind", df)
df <- na.omit(df)
df2 <- melt(df, id=c("time", "typeProd", "typeDeg", "type"))
df2 <- filter(df2, variable %in% c("FP1", "FP2"))
g2 <- ggplot(df2, aes(time, value, color=variable))+geom_line(size=1)+  


  xlab("time (minutes)")+
  facet_wrap(~typeDeg, ncol=1, scales="fixed")+
  scale_x_continuous(breaks=myBreaks)+  

  scale_color_manual(values=c("darkgreen", "red"))+
  ylab("FP1, FP2 fluorescence intensity (a.u.)")+myTheme+
  theme(legend.position="none")
g3 <- ggplot(df, aes_string("time", "Ratio"))+geom_line(color="blue", size=1)+

```

## Supplementary Methods - Automatic generation of paper figures

```
facet_wrap(~typeDeg, ncol=1, scale="fixed")+xlab("time (minutes)")+
  ylab("FP2/FP1 intensity ratio")+scale_x_continuous(breaks=myBreaks)+myTheme
grid.newpage()
pushViewport(viewport(layout=grid.layout(1, 3)))
print(gk, vp=viewport(layout.pos.row=1, layout.pos.col=1))
print(g2, vp=viewport(layout.pos.row=1, layout.pos.col=2))
print(g3, vp=viewport(layout.pos.row=1, layout.pos.col=3))
```

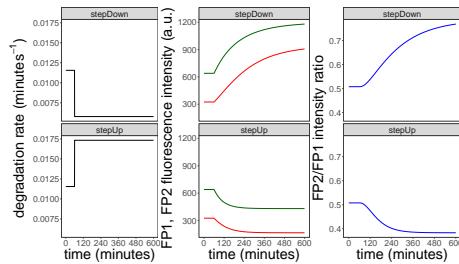

**Figure 19:** Figure S4C: The effect of rapidly changing degradation dynamics on timer readouts when FRET is present.